




Let's get things rolling!

JOWI mobile rack model "X3"

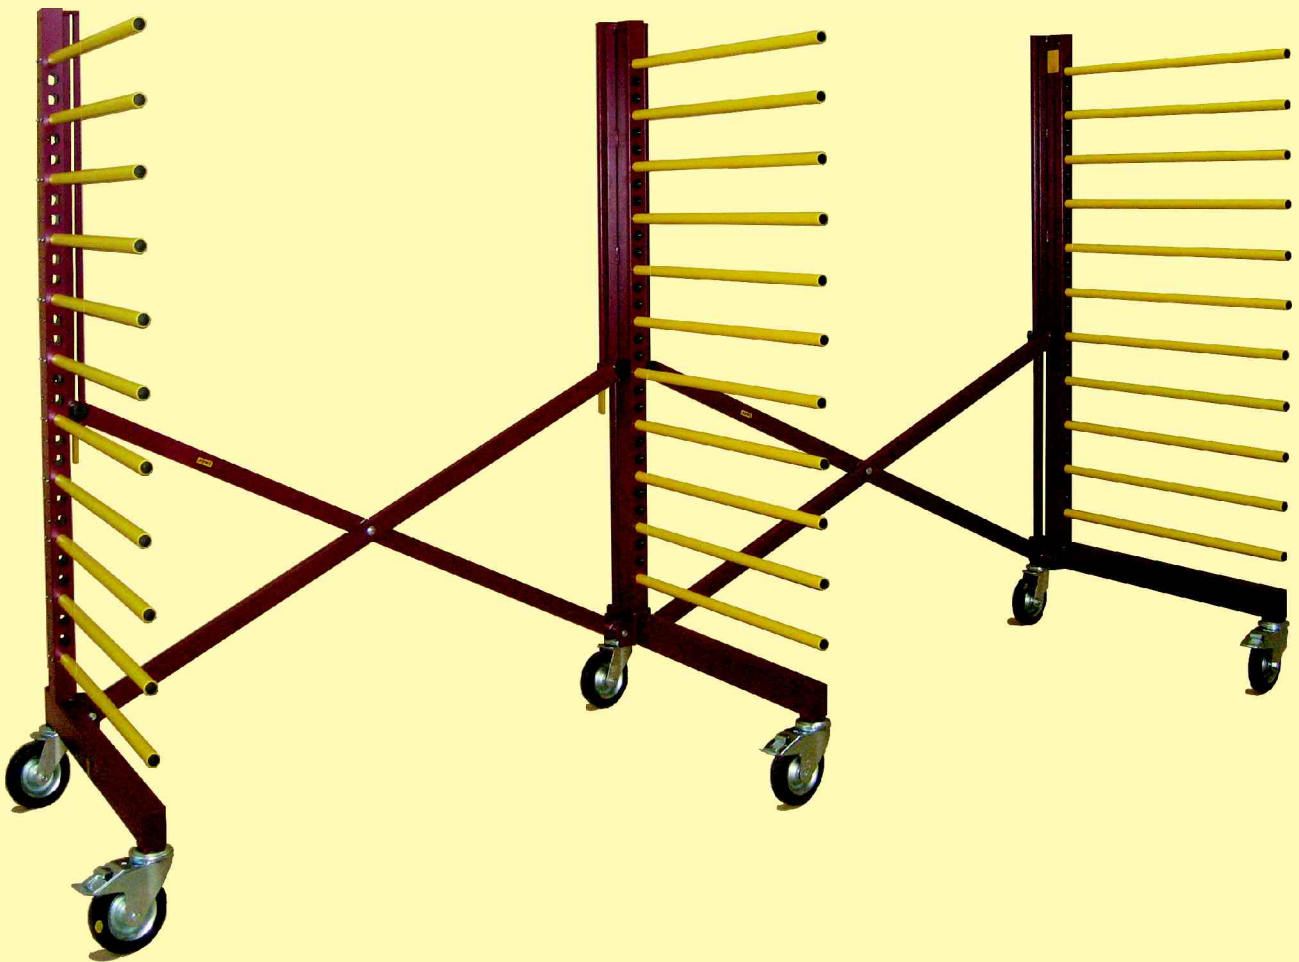


JOWI "X3" for the storage and transportation of long objects up to a length of approx. 5 metres

With the new model variant "X3", JOWI mobile racks offer three supports per level and infinitely variable adjustment of the rack length from 400 to 3200 mm.

You can deposit long objects with a length of up to approx. 5 metres, whereby the third support in the centre of the rack provides additional support for the parts and also increases the load capacity of the rack.



Benefit from the advantages of JOWI and select the model best suitable for you:

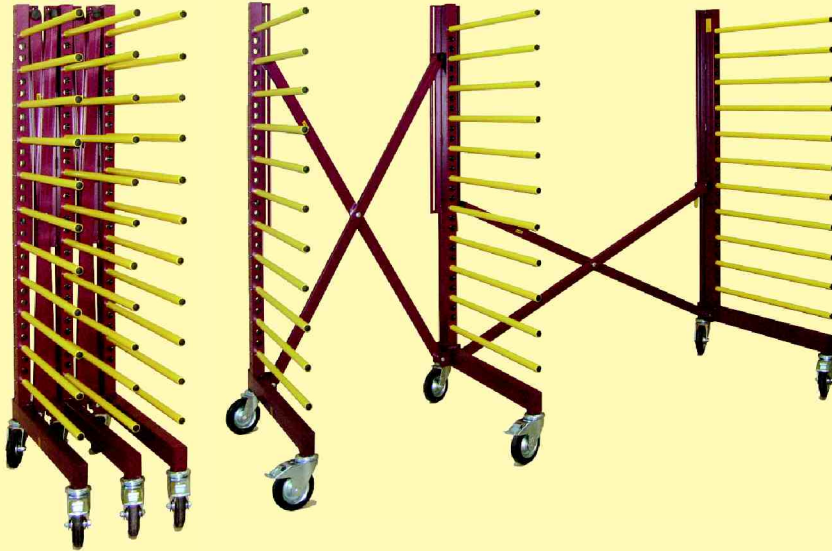

JOWI – easy operation

You can quickly and easily adjust the desired rack length simply by operating 2 levers.

JOWI – supports the work flow

Due to the robust construction and the smoothly running vibration-damping semi-elastic steering castors, you can - as with all JOWI mobile and transport racks – easily roll the fully laden rack from workplace to workplace on your own.

You can individually take out the stored parts for the various processing steps at any time and save pre-sorting.

Model X3									
	L x D x H	Usable length	Maximum load with even load distribution without shock load		Hole pattern	Levels	Clear height	Tube Ø	Wheel Ø
B590-X3	Lmax 3,000 mm / 118.1 in Lmin . . 400 mm / 15.7 in D 730 mm / 28.7 in H . . . 1,810 mm / 71.3 in	590 mm 23.2 in	45 kg 99.2 lb	300 kg 660 lb	16	16	66 mm 2.6 in	23 mm 0.9 in	125 mm 4.9 in
R660-X3	Lmax 3,200 mm / 126.0 in Lmin . . 400 mm / 15.7 in D 830 mm / 32.7 in H . . . 1,920 mm / 75.6 in	660 mm 26.0 in	82 kg 180.8 lb	750 kg 1,650 lb	31	16 ¹¹⁾	66mm 2.6 in 113mm ¹¹⁾ 4.4 in	29 mm 1.1 in	160 mm 6.3 in
B770-X3	Lmax 3,000 mm / 118.1 in Lmin . . 400 mm / 15.7 in D 940 mm / 37.0 in H . . . 1,840 mm / 72.4 in	770 mm 30.3 in	67 kg 147.7 lb	750 kg 1,650 lb	12	12	92 mm 3.6 in	29 mm 1.1 in	160 mm 6.3 in
R900-X3	Lmax 3,200 mm / 126.0 in Lmin . . 400 mm / 15.7 in D . . . 1,060 mm / 41.7 in H . . . 1,920 mm / 75.6 in	900 mm 35.4 in	60 kg 132.3 lb	750 kg 1,650 lb	31	11 ¹⁶⁾	113mm 4.4 in 66 mm ¹⁶⁾ 2.6 in	29 mm 1.1 in	160 mm 6.3 in

^{S)} Available on special order or by retrofitting.

¹¹⁾ For equipping with 11 support tubes

¹⁶⁾ For equipping with 16 support tubes

Subject to change!

Please contact us for any special requirements.